


TRANSPET™ B1-F

DESCRIPTION:

TransPet B1-F is a transparent polyester packaging film that is solvent coated on one side with a PVDC copolymer. The coating is heat sealable and provides an excellent moisture and oxygen barrier. **(Also available in 100 Gauge)**

FDA STATUS:

Manufactured with materials compliant with FDA regulations at temperatures greater than 250°F.

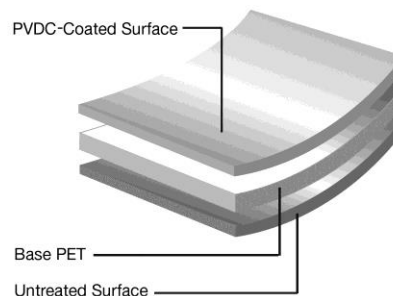

TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUES			TEST METHOD
Thickness	Gauge	50	54	75	-
Yield (nominal)	in ² /lb.	39,600	36,500	24,700	-
Coefficient of Friction	Static	.6	.5-.65	-	ASTM D1894
Tensile Strength at Break MD	kpsi	30-34	27-31.5	25	ASTM D882
Tensile Strength at Break TD	Kpsi	31.5-40	28-32.9	33	ASTM D882
Elongation at Break MD	%	135-140	120-130	130	ASTM D882
Elongation at Break TD	%	100-130	100-125	70	ASTM D882
Heat Shrinkage MD	%	1.5	1.5-2.0	-	ASTM E1204
Haze	%	4.0-4.3	5	8.0	ASTM D1003
Gas Permeability (O ₂ /24 hr)	cc/100 in ²	0.5	0.5	0.6	ASTM D3985
Water Vapor Transmission Rate	g/100 in ² /24 hr	0.6	0.5	0.6	ASTM F1249
Surface Tension	dyne	45	45	-	-

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 9/21/2016

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM