


# TRANSPET™ CS2A

## DESCRIPTION:

TransPet CS2A is an optically clear, two side slip treated film, with high clarity, high gloss, good dimensional stability and excellent handling characteristics. Approved for archiving applications which include encapsulation of paper items in accordance with the Library of Congress Specification #500-500.

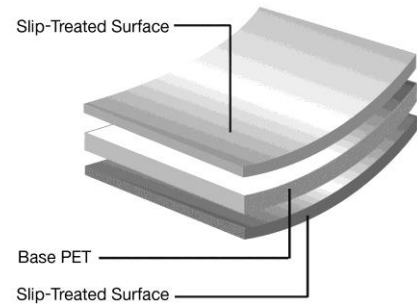

## TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE					TEST METHOD
		200	300	400	500	700	
Thickness	Gauge	200	300	400	500	700	-
Yield	in <sup>2</sup> /lb.	10,044	6,696	5,643	4,018	2870	-
Coefficient of Friction	Kinetic	0.38-0.45	0.35-0.45	0.34-0.45	0.34-0.45	0.34	ASTM D1894
Coefficient of Friction	Static	0.45	0.42	0.41	0.41	0.41	ASTM D1894
TLT	%	90	90	90	90	88.9	ASTM D1003
Tensile Strength MD	psi	30,500	26,000	25,000	23,000	21,000	ASTM D882
Tensile Strength TD	psi	32,000	31,000	30,000	28,000	26,000	ASTM D882
Elongation at Break MD	%	160	185	190	210	250	ASTM D882
Elongation at Break TD	%	120-130	120-130	120-140	120-140	160	ASTM D882
Gloss	%	190	190	190	190	185	ASTM D 523
Heat Shrinkage MD	-	1.2-2.5	1.0-2.5	0.9-2.5	0.9-1.0	0.9	30 min at 150°C
Heat Shrinkage TD	-	0.6-1.0	0.6-1.0	0.6-1.0	0.6-1.0	0.5	30 min at 150°C
Surface Tension Slip	Dyne	50	50	50	50	50	ASTM D2578
Surface Tension Plain	Dyne	45	45	45	45	45	ASTM D2578
Haze	%	0.50-1.0	0.50-1.0	0.50-1.3	0.50-1.7	2.40	ASTM D1003

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 9/20/2016

**CORPORATE HEADQUARTERS** 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

**TRANSCENDIA.COM**