


TRANSPROP™ CWHG1-F

DESCRIPTION:

TransProp CWHG1-F is a white cavitated biaxially oriented polypropylene film. It is a PSA label facestock, with excellent stiffness for use in the removable labels market.

CHARACTERISTICS:

- Cavitated white, high opacity
- One-side treated, excellent stiffness

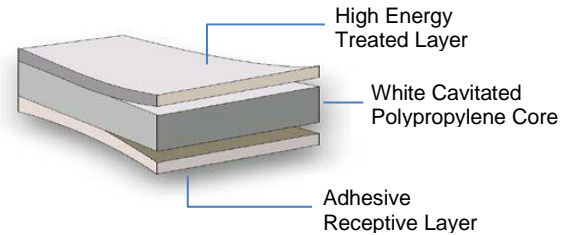

FDA STATUS:

Manufactured with materials compliant with FDA regulations.

TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TECHNICAL DATA			TEST METHOD
Thickness	Gauge	157	240	256	-
Yield	in ² /lb	24,800	16,500	15,200	-
Opacity	%	90	95	96	ASTM D589-97
Gloss (45°)	Gloss units	65	60		60
Tensile Strength MD	lb/in ²	13,000	13,000	13,000	ASTM D882
Tensile Strength TD	lb/in ²	23,000	23,000	23,000	ASTM D882
Elongation at Break MD	%	150	150	150	ASTM D882
Elongation at Break TD	%	45	45	45	ASTM D882
Dimensional Stability MD	%	<4	<4	<4	266°F, 5 min
Dimensional Stability TD	%	<3	<3	<3	266°F, 5 min
Surface Energy (High Energy Flame Side)	dyne/cm	40	40	40	ASTM D2578
Surface Energy (Corona Treated Side)	dyne/cm	36	36	36	ASTM D2578

*All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 11/16/2018

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM