


# PROCITE® DWF CLEAR

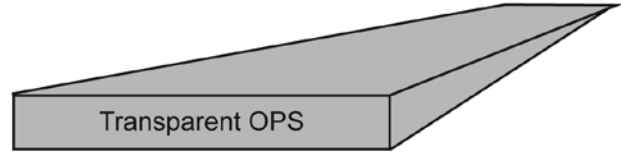

## DESCRIPTION:

PROCITE® DFW Clear is a low dusting, transparent, biaxially oriented polystyrene film designed for window envelope patches.

## CHARACTERISTICS:

- Low dust
- Transparent
- Good dimensional stability

## TECHNICAL DATA:

| PROPERTIES                        | UNIT OF MEASURE      | TYPICAL VALUE* |        |        | TEST METHOD      |
|-----------------------------------|----------------------|----------------|--------|--------|------------------|
|                                   |                      | 115            | 125    | 150    |                  |
| Thickness                         | Gauge                | 115            | 125    | 150    | Transilwrap test |
| Yield                             | in <sup>2</sup> /lb. | 22,955         | 21,120 | 17,600 | ASTM D2103       |
| Tensile Strength at Break MD      | psi                  | 12,000         |        |        | ASTM D882        |
| Tensile Strength at Break TD      | psi                  | 11,000         |        |        | ASTM D882        |
| Elongation at Break MD            | %                    | 20             |        |        | ASTM D882        |
| Elongation at Break TD            | %                    | 40             |        |        | ASTM D882        |
| Elasticity Modulus MD (1% Secant) | psi                  | 435,000        |        |        | ASTM D882        |
| Elasticity Modulus TD (1% Secant) | psi                  | 430,000        |        |        | ASTM D882        |
| Haze                              | %                    | 8              |        |        | ASTM D1003       |
| Gloss                             | %                    | 150            |        |        | ASTM D2457       |

\* Values for reference data only. Contact a Transilwrap film sales representative for actual gauges available. Note: All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The information does not constitute a warranty nor guarantee of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own tests. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the information.