


TRANS-CLING™ Window Face Film

DESCRIPTION:

TRANS-CLING™ Window Face Film is a 2.0 mil clear film coated with adhesives and a clear protected liner on both sides. One side is coated with a permanent pressure-sensitive adhesive for cold lamination to the printed plastic's surface. The other side is coated with a low tack removable adhesive that will adhere your printed decal or signage to glass exterior doors, glass windows, or glass cooler doors. It can also be cleanly removed when the promotion or application has concluded.

CHARACTERISTICS

- Designed to produce push/pull signs that adhere seamlessly to glass. Other surfaces must be tested before application.
- Companion product for two-sided printable, completely opaque TRANS-PAQUE™ film for the creation of push/pull signs.
- Clarity of film and adhesive allows printed graphics to show through clearly.
- More versatile than static cling vinyl; eliminates flood coating, reverse printing and other processes to product push/pull signs.
- Two-year shelf life when stored at 73°F and 50% relative humidity.

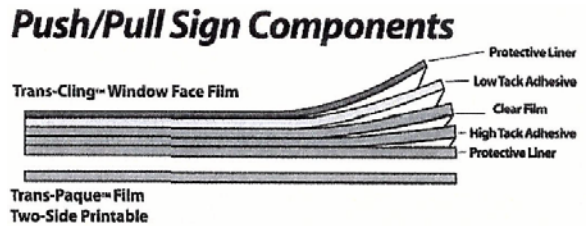

SPECIAL PRECAUTIONS:

The adhesion of the permanent adhesive to an ink may be directly affected by additives in the ink. Silicones or additives in the ink may reduce adhesion of the permanent adhesive to unacceptable levels. Test every ink system for compatibility with the permanent adhesive before production.

TECHNICAL DATA:

PROPERTY	UNIT OF MEASURE	PROPERTY VALUE Minimum Application Temperature	SERVICE TEMPERATURE RANGE	TEST METHOD
Thickness Thickness Variance ± 10%	mil	2.0 mil 0.0008 ±0.002 1.5 mil on Both Sides		-
Width	Inches	Rolls up to 54		-
Temperature Ranges	F°	50°	-40° to + 180°	-
Adhesion	15 to 17 oz. to glass PSTC-1 with 24 hour dwell at 73°F and 50% relative humidity. Typical values. Individual values may vary. Test thoroughly before production.			
Shear (1/2"x1/3"x 500GMS)	2 Years			
Water Resistance	Fair. Not recommended where immersed.			

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 08/21/2018

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.321-8544 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM

© 2018 Transcendia Inc. All Rights Reserved.