


TRANSCELLO® XSB-F

FEATURES – GENERAL PURPOSE WHITE OPAQUE FILM

Regenerated cellulose film (RCF), coated on both sides with a polyvinylidene chloride (PVdC) copolymer.

- Heat-sealable on both sides
- Excellent barrier to water vapor, gases and aromas
- Low UV/visible light transmission giving improved protection against rancidity
- Enhanced fine-tone print definition
- Inherent anti-static properties
- Resistant to oils and greases
- Both sides of the film are equally receptive to inks, adhesives and tear-tapes
- Excellent dead-fold characteristics
- Based on renewable wood pulp

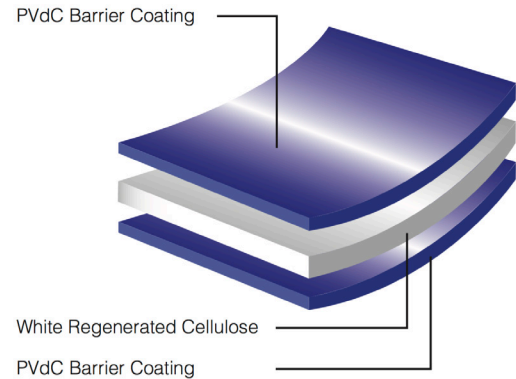

APPLICATIONS

340/360XSB-F are suitable for use as a single film or in laminate structures for overwrapping and form-fill-seal packaging. Used as a single film for twist-wrap applications.

390/440XSB-F are particularly suitable for rollwrap applications.

A range of colored PVdC coated films is also available. For details, please contact your local Transcendia office.

TECHNICAL PROPERTIES (TYPICAL VALUES)

PROPERTY	TEST BASIS	TEST CONDITIONS	UNITS	XSB-F			
				340	360	390	440
THICKNESS	Transcendia test	-	mil	0.87	0.93	1.00	1.13
YIELD	Transcendia test	-	in ² /lb	20700	19500	18000	16000
PERMEABILITY TO:	WATER VAPOR	ASTM E96	100°F 90% RH	g/100in ² .24 hrs			
	OXYGEN	ASTM F 1927	73°F 50% RH	cc/100in ² .24 hrs			
OPTICAL:	GLOSS	ASTM D 2457	45°	units			
	OPTICAL DENSITY	Transcendia test	-	-			
	OPACITY	Transcendia test	-	%			
COEFFICIENT OF FRICTION (FILM TO FILM)	ASTM D 1894	Static	-	0.25			
		Dynamic	-	0.20			
TENSILE STRENGTH	ASTM D 882	-	kpsi	MD	17		
				TD	9		
ELONGATION AT BREAK	ASTM D 882	-	%	MD	22		
				TD	70		
ELASTICITY MODULUS (1% SECANT)	ASTM D 882	-	kpsi	MD	>290		
				TD	>145		
SEALING RANGE	Transcendia test	0.5 secs; 10 psi	°F	210-320			
SEAL STRENGTH	Transcendia test	275°F; 0.5 secs; 10 psi	g(f)/1½in	225			

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

FOOD CONTACT

TRANSCELLO® XSB-F is formulated to comply with US legislation for many room temperature food contact applications. Customers intending to use the film in a food contact application must request the Declaration of Compliance which gives full details. For information on other countries please contact your Transcendia Sales Office.

HEALTH AND SAFETY GUIDELINES

For Health and Safety information, please refer to literature reference A190.

FILM STORAGE

To maintain the high quality of this product during storage it is recommended that TRANSCELLO® XSB-F should be stored in its original wrapping away from any source of local heating or direct sunlight.

Recommended conditions of storage are:

Temperature: 60-75°F

Relative Humidity: 35-55%

TRANSCELLO® XSB-F is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM

Top AIB Rated Facilities | ISO: 9001 Certified Facilities

©2020 Transcendia, Inc.