


# TRANSPET® AS2

**DESCRIPTION:**

TRANSPET® AS2 is a clear polyester film with anti-static properties on both surfaces for improved web handling and safety. **(Also available in 700 gauge)**

**CHARACTERISTICS:**

- Good sheet handling capabilities
- Excellent dust and static repellency control
- UL recognized

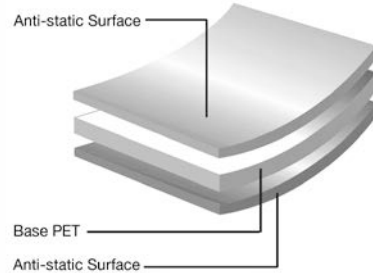

**TECHNICAL DATA:**

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE			TEST METHOD
Thickness	Gauge	370	440	640	-
Yield	in <sup>2</sup> /lb	5,361	4,508	3,099	-
Tensile Strength MD	psi	28,000	28,000	28,000	ASTM D882A
Tensile Strength TD	psi	35,000	35,000	35,000	ASTM D882A
Elongation at Break MD	%	160	160	160	ASTM D882A
Elongation at Break TD	%	120	120	120	ASTM D882A
Haze	%	< 1.0	< 1.0	< 1.0	ASTM D1003
TLT	%	88.5	88.4	88.2	ASTM D1003
Heat Shrinkage MD	%	4.0	4.0	4.0	Unrestrained @ 190°C/5 min.
Heat Shrinkage TD	%	1.0	1.0	1.0	Unrestrained @ 190°C/5 min.

\*All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 9/19/2016

**CORPORATE HEADQUARTERS** 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

**TRANSCENDIA.COM**