

TRANSPET® C2SL-F

DESCRIPTION:


TRANSPET® C2SL-F is a clear polyester film that is chemically treated two sides to enhance adhesion to solvent based inks and coatings.

CHARACTERISTICS:

- Excellent adhesion promotion for high quality printing

FDA STATUS:

Manufactured with materials compliant with FDA regulations.

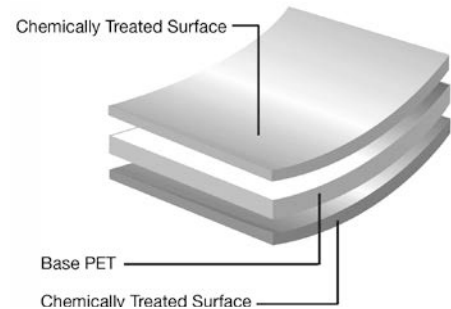

TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE		TEST METHOD
Thickness	Gauge	40	48	-
Yield (nominal)	in ² /lb.	50,400	42,000	-
Coefficient of Friction	Static	0.44	0.44	ASTM D1894
Coefficient of Friction	Dynamic	0.32	0.32	ASTM D1894
Tensile Strength MD	psi	31,500	31,500	ASTM D882
Tensile Strength TD	psi	32,900	32,900	ASTM D882
Elongation at Break MD	%	130	130	ASTM D882
Elongation at Break TD	%	125	125	ASTM D882
Haze	%	2.3	2.3	ASTM D1003
TLT	%	89	88	ASTM D1003
Heat Shrinkage MD	%	2.0	2.0	ASTM D1204 150°C x 30 min.
Heat Shrinkage TD	%	0.2	0.2	ASTM D1204 150°C x 30 min.

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 9/28/2016

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM