


TRANSPET® CT1-F

DESCRIPTION:

TRANSPET® CT1-F is an uncoated polyester film that is corona treated on one side to provide superior wetting and adhesion of inks, primers and adhesives. It combines high strength and durability, good dimensional stability and excellent chemical resistance. **(Also available in 32, 36, 44, 60, 75, and 300 gauge).**

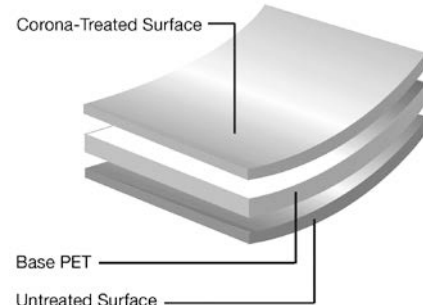

FDA STATUS:

Manufactured with materials compliant with FDA regulations.

TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE					TEST METHOD
		48	92	120	142	200	
Thickness	Gauge	48	92	120	142	200	-
Yield	in ² /lb.	41,700	22,000	16800	13,950	10,044	-
Tensile Strength MD	psi	27,000-43,000	27,000-38,400	2000	25,000-36,000	25,000-35,557	ASTM D882
Tensile Strength TD	psi	28,500-38,000	28,000-40,000	2100	28,500-35,557	28,500-35,557	ASTM D882
Elongation at Break MD	%	105-135	115-150	145	120-170	125-180	ASTM D882
Elongation at Break TD	%	70-140	80-140	140	90-140	90-140	ASTM D882
Haze	%	2.5-4.5	3.0-9.0	3.2	1.5-12	1.8-5.5	ASTM D1003
Heat Shrinkage MD	%	1.25-4.2	1.6-4.0	1.6	1.5-3.5	2.0-3.5	30 min at 150°C
Heat Shrinkage TD	%	0.5-1.3	0.2-1.6	0.2	0.5-1.0	1.0	30 min at 150°C
Surface Tension (Treated Side)	Dyne	52>	52>	42	52>	52>	ASTM D2578

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 02/02/2018

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM