


TRANSPET® WOAD2LG-F

DESCRIPTION:

TRANSPET® WOAD2LG-F is a white opaque polyester film with adhesion promoting chemical treatment on both sides, providing enhanced adhesion to coatings, inks and adhesives.

CHARACTERISTICS:

- Lower gloss than WOAD2-F
- Good opacity and excellent machinability
- Excellent slip and dimensional stability over a wide range of temperatures

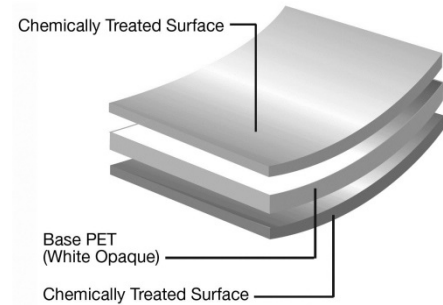

FDA STATUS:

Manufactured with materials compliant with FDA regulations.

TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE					TEST METHOD
Thickness	Gauge	144	200	300	400	500	-
Yield	in ² /lb.	13,500	9700	6500	4850	4015	-
Coefficient of Friction	Dynamic	.32	.30	.28	.28	.3	ASTM D1894
Coefficient of Friction	Static	.36	.34	.32	.32	.4	ASTM D1894
Opacity	%	90	92	93	95	98	-
TLT	%	22	19	15	10	8	ASTM D1003
Tensile Strength MD	psi	20,000	20,000	19,300	18,600	17,100	ASTM D882
Tensile Strength TD	psi	22,800	22,800	22,200	21,400	20,000	ASTM D882
Elongation at Break MD	%	115	115	145	165	150	ASTM D882
Elongation at Break TD	%	85	85	90	100	100	ASTM D882
Surface Tension	Dyne/cm	42	42	42	42	42	ASTM D 2578
Heat Shrinkage MD	%	1.6	1.6	1.2	1.2	1.2	ASTM D1204 30 min at 150°C
Heat Shrinkage TD	%	0.2	0.2	0.2	0.2	.2	ASTM D1204 30 min at 150°C

*All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 9/29/2016

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM

© 2016 Transcendia Inc. All Rights Reserved.