


TRANSPET® WOPAD1

DESCRIPTION:

TRANSPET® WOPAD1 is a white, opaque pearlescent polyester film with excellent handling properties that is pretreated on one side to promote adhesion to most coatings, inks and adhesives.

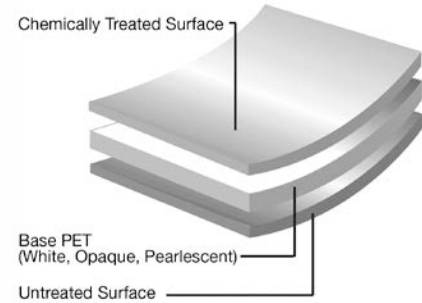

TECHNICAL DATA:

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE			TEST METHOD
Thickness	Gauge	200	300	700	-
Yield	in ² /lb.	9,918	6,612	2,833	-
Coefficient of Friction	Dynamic	0.3-0.4	0.3-0.4	0.3-0.4	ASTM D1894
Coefficient of Friction	Static	0.3-0.4	0.3-0.4	0.3-0.4	ASTM D1894
TLT	%	12	9.3	4.9	ASTM D1003
Tensile Strength MD	psi	23,000	23,000	23,000	ASTM D882A
Tensile Strength TD	psi	27,000	27,000	27,000	ASTM D882A
Elongation at Break MD	%	135	135	135	ASTM D882A
Elongation at Break TD	%	95	95	95	ASTM D882A
Gloss @ 60°	%	45	45	45	ASTM D 523
Heat Shrinkage MD	%	2.8	1.5	1.5	Unrestrained at 190°C/5 min
Heat Shrinkage TD	%	1.0	1.5	1.5	Unrestrained at 190°C/5 min
Density	g/cm ³	1.43	1.43	1.48	ASTM D1505

All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

Revision Date: 9/21/2016

CORPORATE HEADQUARTERS 9201 W. Belmont Avenue | Franklin Park, IL 60131

USA 800.618.5060 | 847.678.1800 main | 847.233.0199 fax

CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax

TRANSCENDIA.COM

© 2016 Transcendia Inc. All Rights Reserved.