


METALIZED HOLOGRAPHIC

PET LAMINATING FILM

Transcendia's Metalized Holographic Polyester Films are specially engineered with a co-polymer adhesive. This adhesive technology provides superior adhesion to heavily loaded inks and hard-to-stick-to plastics. All Holographic Polyester Films feature brilliant, multi-dimensional patterns perfect for decorative applications.


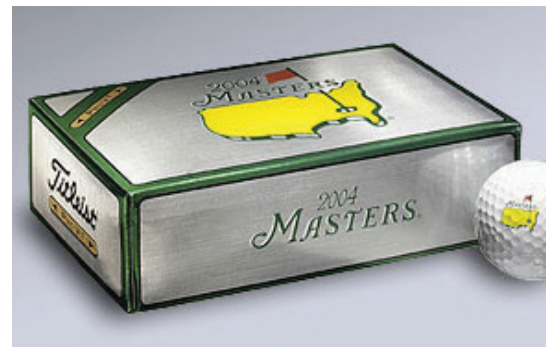


SPECIFICATIONS

- Available master roll width: 27.5"
- Custom master roll widths available
- 19 standard patterns (custom patterns available)
- Standard roll length: 3,000 ft.

BENEFITS & FEATURES

- Holographic patterns create eye-catching visual effects
- Acrylic coated for printability and gluing
- Excellent adhesion to core materials and heavily loaded inks
- Can be die cut and vacuum formed

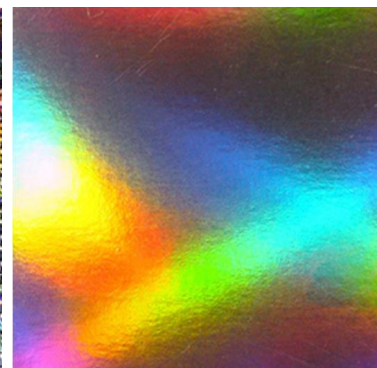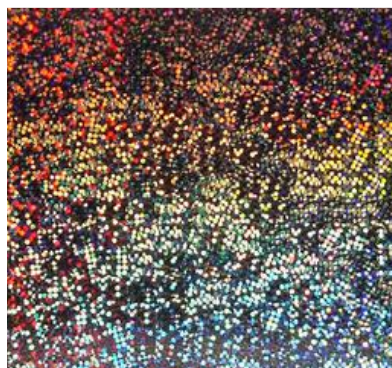

PERFECT FOR:

- Loyalty/Gift Cards
- POP Displays
- Trading Cards
- Promotional Materials
- Specialty Packaging

PROPERTIES	UNIT OF MEASURE	2.0 GLOSS	TEST METHOD
Thickness (±10%)	inches	.002"	
Yield	in ² /lb	11,650	
COF, base film side (Kinetic)		0.35 to 0.55	ASTM D1894
Tensile Strength MD	psi	13,800	ASTM D882
Tensile Strength TD	psi	16,500	ASTM D882
Elongation at Break MD	%	100	ASTM D882
Elongation at Break TD	%	90	
Laminating Temperature Range (internal)	°F	210 to 230	
Bond Strength	lb/in	4 to 7	

NOTE: All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

